


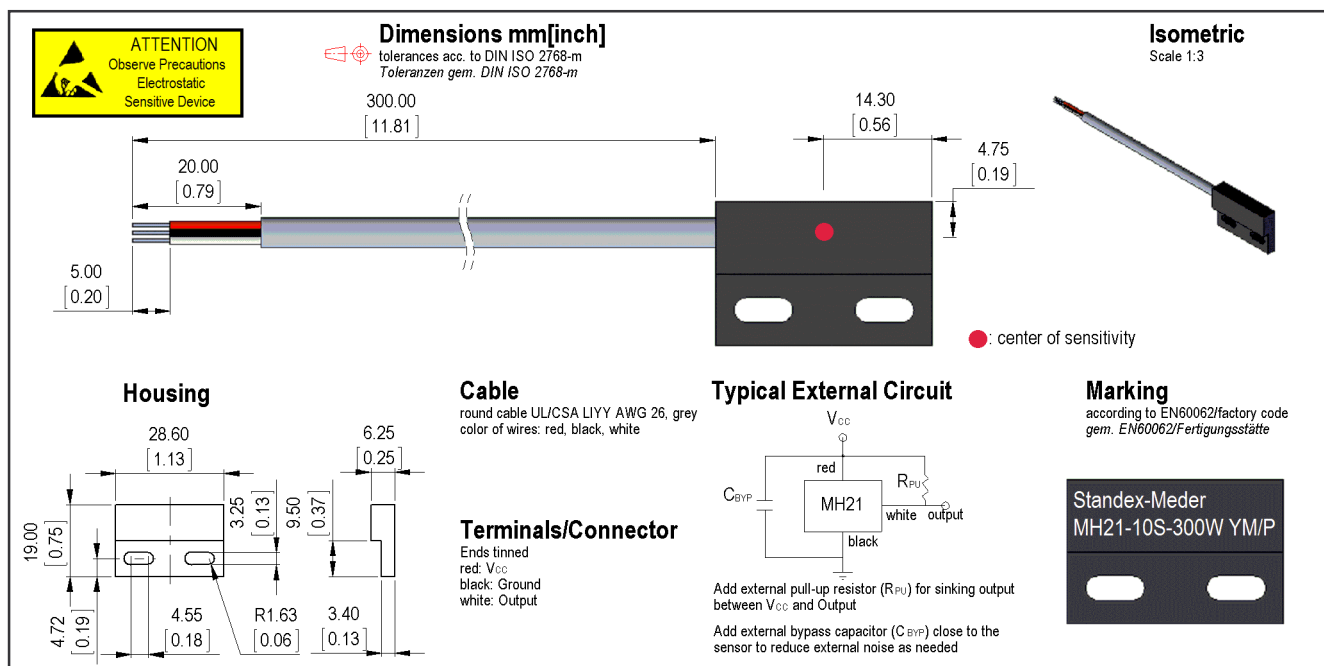

Magnetic properties	Conditions	Min	Typ	Max	Unit
Hall Type		Micropower Switch			
Operation		Omnipolar			
Output On	T=25°C and VDD=2.75V		37		Gauss
Output Off	T=25°C and VDD=2.75V		31		Gauss
Hysteresis	T=25°C and VDD=2.75V		6		Gauss

Technical data	Conditions	Min	Typ	Max	Unit
Supply voltage		2.5	2.75	3.5	VDC
Supply current				2	mA
Operating temperature range		-40		85	°C
Storage temperature		-60		105	°C

Cable specification	Conditions	Min	Typ	Max	Unit
Cable type		round cable			
Strand number			3		
Structure of strands		AWG 26 7x0,16			
Insulation single strands		PVC			
Strands color		red, black, white			
Insulation cable sheath		PVC			
Sheath color	DIN 47100	grey			
Outer diameter of a cable jacket			3.8		mm

General data	Conditions	Min	Typ	Max	Unit
Tightening torque	Screw M3 ISO 1207 Disk ISO 7089			0.5	Nm
Mounting advice		decreased switching distances when mounted near iron			
Mounting advice		magnetically conductive screws must not be used			
Case color		black			
Sealing compound		Polyurethan			
Remark		direct custom inquiries to sales@standexmeder.com			

Do you like this solution?

Please contact Heynen for distribution in BENELUX.

[heynen@heynen.com](mailto:heynen@heyнен.com)

NL tel: +31 (0)485-550909

BE tel: +32 (0)11-600909

LUX tel: +352(0)26-910781

